

03-02-00

A

UTILITY PATENT APPLICATION TRANSMITTAL

March 1, 2000

Attorney Docket No.:	CE08144R	Total Pages:	2
First-Named Inventor or Application Identifier	Pan, et al.		
Title:	TRANSMISSION WITHIN A WIRELESS COMMUNICATION SYSTEM		
Express Mail Label No.:	EJ230848025US		

(Only for new nonprovisional applications under 37 CFR 1.53(b))

APPLICATION ELEMENTS (see MPEP chapter 600 concerning utility patent application contents)	ADDRESS TO:	Assistant Commissioner for Patents Box Patent Application Washington, D.C. 20231
---	--------------------	--


1.	<input checked="" type="checkbox"/> Fee Transmittal Form <i>in duplicate</i>		
2.	<input checked="" type="checkbox"/> Specification	Total Pages	16
3.	<input checked="" type="checkbox"/> Drawings	Total Sheets:	6
4.	<input checked="" type="checkbox"/> Oath or Declaration with Power of Attorney	Total Pages	4
	a. <input checked="" type="checkbox"/> Newly Executed (original or copy)		
	b. <input type="checkbox"/> Copy from prior application (37 CFR §1.63(d)) (for continuation/divisional with Box 17 completed)		
	i. <input type="checkbox"/> <u>Deletion of Inventor(s):</u> Signed statement attached deleting inventor(s) named in the prior application (see 37 CFR §1.63(d)(2) and 1.33(b))		
5.	<input type="checkbox"/> Incorporation by Reference <i>(useable if Box 4b is checked)</i> The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.		
6.	<input type="checkbox"/> Microfiche Computer Program (Appendix)		
7.	<input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission		

ACCOMPANYING APPLICATION PARTS

8.	<input checked="" type="checkbox"/> Assignment Papers <i>(cover sheet and document(s))</i>	
9.	<input type="checkbox"/> 37 CFR §3.73(b) Statement (when there is an assignee)	<input type="checkbox"/> Power of Attorney
10.	<input type="checkbox"/> English Translation Document <i>(if applicable)</i>	
11.	<input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449	<input type="checkbox"/> Copies of IDS Citations
12.	<input type="checkbox"/> Preliminary Amendment	
13.	<input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <i>(should be specially itemized)</i>	
14.	<input type="checkbox"/> Small Entity Statements	

15.	<input type="checkbox"/>	Certified Copy of Priority Document(s)
16.	<input checked="" type="checkbox"/>	Other: Inventor Information Form (Print EFS)
17.	IF A CONTINUING APPLICATION <i>check appropriate box and supply the requisite information below and in a preliminary amendment:</i>	
	<input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-Part (CIP)	Prior Appl. No. _____
Prior Appl. information: Examiner: Group/Art Unit:		

CORRESPONDENCE ADDRESS					
NAME	Kenneth A. Haas Attorney for Applicant(s)				
Reg. No.	42,614				
ADDRESS	Motorola, Inc. Intellectual Property Section Law Department 1303 E. Algonquin Road				
CITY	Schaumburg	STATE	IL	ZIP CODE	60196
COUNTRY	U.S.A.	TELEPHONE	(847) 576-6937	FAX	(847) 576-3750

SUBMITTED BY			
NAME	Kenneth A. Haas	Reg. No.	42,614
SIGNATURE			
DATE	March 1, 2000	Deposit Account User ID	13-4772

INVENTOR INFORMATION

Inventor One Given Name:: ShaoWei
Family Name:: Pan
Postal Address Line One:: 157 W. Harbor Drive
City:: Lake Zurich
State or Province:: Illinois
Country:: USA
Postal or Zip Code:: 60004
City of Residence:: Lake Zurich
State or Province of Residence:: Illinois
Country of Residence:: USA
Citizenship Country:: China
Inventor Two Given Name:: Jinzhong
Family Name:: Zhang
Postal Address Line One:: 1919 Prairie Square, #132
City:: Schaumburg
State or Province:: Illinois
Country:: USA
Postal or Zip Code:: 60173
City of Residence:: Schaumburg
State or Province of Residence:: Illinois
Country of Residence:: USA
Citizenship Country:: China
Inventor Three Given Name:: Chunyang
Family Name:: Meng
Postal Address Line One:: 1119 Lexington Lane
City:: Lake Zurich
State or Province:: Illinois
Country:: USA
Postal or Zip Code:: 60047
City of Residence:: Lake Zurich
State or Province of Residence:: Illinois
Country of Residence:: USA
Citizenship Country:: China
Inventor Four Given Name:: Hechun
Family Name:: Cai
Postal Address Line One:: 42 Southfield Drive
City:: Vernon Hills
State or Province:: Illinois
Country:: USA
Postal or Zip Code:: 60061
City of Residence:: Vernon Hills
State or Province of Residence:: Illinois
Country of Residence:: USA
Citizenship Country:: China
Inventor Five Given Name:: Richard A
Family Name:: Comroe
Postal Address Line One:: 10 Lexington Road
City:: South Barrington

State or Province:: Illinois
Country:: USA
Postal or Zip Code:: 60010
City of Residence:: South Barrington
State or Province of Residence:: Illinois
Country of Residence:: USA
Citizenship Country:: USA

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 22917
Fax One:: (847) 576-3750

APPLICATION INFORMATION

Title Line One:: Transmission within a Wireless Communica
Title Line Two:: tion System
Total Drawing Sheets:: 6
Formal Drawings?: No
Application Type:: Utility
Docket Number:: CE08144R
Secrecy Order in Parent Appl.?: No

Source:: PrintEFS Version 1.0.1

2025 RELEASE UNDER E.O. 14176

TRANSMISSION WITHIN A WIRELESS COMMUNICATION SYSTEM

Field of the Invention

The present invention relates generally to communication systems and, in particular, to data transmission within a wireless communication system.

Background of the Invention

Next generation wireless communication system architecture must be able to provide an array of services comparable to wire-line services. One such service envisioned for the next generation Code Division Multiple Access (CDMA) architecture is multicasting. By definition, multicasting is a method which provides the delivery of information to multiple destinations without transmitting the same information content to each destination separately.

Typically, multicasting generates a great deal of traffic in a network. More particularly, large amounts of traffic are generated because each individual involved in a multicast session passes uplink information through the network. The magnitude of traffic is directly related to the amount of data that is transmitted through the network. Thus it is beneficial for a communication system to transmit as little as possible in order to reduce the network congestion. Therefore, a need exists for a method and apparatus for transmission in a wireless communication system that minimizes network traffic.

Brief Description of the Drawings

FIG. 1 is a block diagram of a communication system in accordance with the preferred embodiment of the present invention.

FIG. 2 is a block diagram of the base station of FIG. 1 in accordance with the preferred embodiment of the present invention.

FIG. 3 is a flow chart showing operation of the base stations of FIG. 1 and FIG. 2 in accordance with the preferred embodiment of the present invention.

FIG. 4 is a block diagram of a Multiple Control Unit of FIG. 1 in accordance with the preferred embodiment of the present invention.

FIG. 5 is a flow chart showing operation of a Multiple Control Unit of FIG. 1 in accordance with the preferred embodiment of the present invention.

5 FIG. 6 is a flow chart showing operation of a Multiple Control Unit of FIG. 1 in accordance with the preferred embodiment of the present invention.

Detailed Description of the Drawings

10

To address the need for transmission within a communication system that reduces network congestion a method and apparatus for transmission within a communication system is provided herein. In accordance with the preferred embodiment of the present invention all remote units participating in a group call
15 can actively transmit uplink communications to their respective base stations via low-data rate traffic channels. The remote units having the highest transmit energies are summed and broadcast to all remote units participating in the group call. Because only those remote units having the highest transmit energies are summed and broadcast, network congestion is greatly reduced.

20

The present invention encompasses a method for transmission within a wireless communication system. The method comprises the steps of receiving a plurality of uplink transmissions from a plurality of remote units and determining a subset of the plurality of remote units. In the preferred embodiment of the present invention the subset is determined based on an energy of an uplink
25 transmission of each remote unit from the plurality of remote units. Uplink transmissions are combined for the subset to produce a combined signal, and the combined signal is transmitted to a base station to be broadcast via a downlink communication signal to the plurality of remote units.

30

The present invention additionally encompasses a method for transmission within a wireless communication system. The method comprises the steps of receiving a first plurality of uplink voice transmissions from a plurality of remote units and determining a second plurality of uplink voice transmissions from the first plurality of uplink voice transmissions. In the preferred embodiment of the present invention the second plurality of uplink voice transmissions are
35 determined based on an energy of their transmission. The second plurality of

uplink voice transmissions are combined and transmitted to a base station to be broadcast via a downlink voice channel to the plurality of remote units

The present invention additionally encompasses an apparatus comprising a logic unit having a first plurality of uplink transmissions from a plurality of remote units as an input and outputting a second plurality of uplink transmissions taken from the first plurality of uplink transmissions. In the preferred embodiment of the present invention the second plurality of uplink transmissions are determined based on an energy of their uplink transmission. The apparatus additionally comprises a transcoder having the second plurality of uplink transmissions as an input and outputting a signal equivalent to the combination of the plurality of uplink transmissions.

Turning now to the drawings, wherein like numerals designate like components, FIG. 1 is a block diagram of communication system 100 in accordance with the preferred embodiment of the present invention. In the preferred embodiment of the present invention, communication system 100 utilizes a next generation CDMA architecture as described in the cdma2000 International Telecommunication Union-Radio communication (ITU-R) Radio Transmission Technology (RTT) Candidate Submission document, but in alternate embodiments communication system 100 may utilize other analog or digital cellular communication system protocols such as, but not limited to, the next generation Global System for Mobile Communications (GSM) protocol, or the CDMA system protocol as described in "Personal Station-Base Station Compatibility Requirements for 1.8 to 2.0 GHz Code Division Multiple Access (CDMA) Personal Communication Systems" (American National Standards Institute (ANSI) J-STD-008).

Communication system 100 includes network 112 coupled to Radio Access Networks (RANs) 121-122. Each RAN 121-122 comprises a plurality of remote, or mobile units (MUs) 113-118, at least one Base Transceiver Station (BTS) 101-102, and at least one Multiple Control Unit (MCU) 119-120. Although not shown, RANs 121-122 additionally include well known network elements such as Mobile Switching Centers (MSCs), Centralized Base Station Controllers (CBSCs) in a circuit switch network, or such as Radio Network Controller (RNCs), Gatekeepers (GKs) and GateWays (GWs) in a packet switch network. It is contemplated that network elements within communication system 100 are configured in well known manners with processors, memories, instruction sets,

and the like, which function in any suitable manner to perform the function set forth herein.

In the preferred embodiment of the present invention base stations 101-102 are capable of providing a multicasting session over network 112. More particularly, base stations 101-102 utilize the Internet Group Management Protocol (IGMP) as described in Request for Comments (RFC) document 1112 and RFC 2236 of the Internet Engineering Task Force (IETF) to provide multicasting. Remote units 113-118 that wish to receive a multicast session, monitor a multicast advertisement message on a system broadcast channel to determine a session to receive. Broadcast channels are part of the common forward physical/paging channel as described in Mobile Station-Base Station Compatibility Standards for Dual-Mode Wideband Spread Spectrum Cellular Systems, Telecommunications Industry Association Interim Standard 95A, Washington, DC July 1993 (IS-95A), which is incorporated by reference herein.

In the preferred embodiment of the present invention, advertisement messages include information about multicast events available to remote units 113-118. The information includes the session's Internet Protocol (IP) address, port number, time and duration of the transmission, and a brief description of the event. In the preferred embodiment of the present invention, the supplemental channel request/granted/control messages for the CDMA air interface is carried as a payload in the TIA/EIA/95 Data Burst messages. An Extended Burst Type Assignment of 0x8001, as defined in TIA/EIA/TSB58-B Table 4.2-1, is used to indicate that Data Burst carries a dispatch control messages.

Base stations 101-102 will join a multicast session and forward it over the air interface via a high-speed data channel (supplemental channel) if there is at least one remote unit 113-118 that requested participation in the session. Once a remote unit requests participation in the multicast event, a common supplemental channel is assigned to the remote unit, and the multicast session is broadcast to all remote units currently participating in the multicast event.

FIG. 2 is a block diagram of base stations 101-102 of FIG. 1 in accordance with the preferred embodiment of the present invention. Base stations 101-102 comprises logic unit 201, transmit/receive circuitry comprising one or more common control channel circuits 204, one or more fundamental channel circuits 203, one or more supplemental channel circuits 205, summer 211, and modulator 215. In the preferred embodiment of the present invention, communication to

OUT OF SEQUENCE

remote units 113-118 may take place utilizing the supplemental channel circuitry 205 and/or fundamental channel circuitry 203. In particular, base stations 101-102 utilize two classes of channels defined for both forward and reverse transmission. In the preferred embodiment, fundamental channels 203 are similar to existing
5 CDMA traffic channels used for voice and signaling. Similarly, common control channel 204 is used for passing system information and control signaling, along with multicast advertisement information.

When transmitting a multicast session (or group call), fundamental channels 203 or common control channels 204 (i.e., low data-rate channels) are
10 utilized to transmit Internet Group Management Protocol (IGMP) messages for subscribing and de-subscribing to a multicast session. Fundamental channels 203 are also utilized to receive and transmit voice data to remote units 113-118 involved in the group call. CDMA traffic and common control channels are described in detail in IS-95A as well as the RTT Candidate Submission
15 Document. Additionally, soft handoff (simultaneous communication utilizing more than one fundamental channel circuit 203) is supported utilizing fundamental channel circuitry 203.

Supplemental channel circuitry 205 is utilized for communicating high data rate services (e.g., multicast packet data, video, . . . , etc.) to remote units 113-
20 118. The data rate of the supplemental channels is specified prior to transmission. Multiple data sources are time multiplexed on this channel. In addition, the Quality-of-Service (e.g., Frame Error Rate (FER), Bit Error Rate (BER) and/or Transmission Delay) of this channel may be set and operated independently of the fundamental channel. A description of both a supplemental and fundamental
25 channel can be found in US Pat. No. _____ (Attorney Docket No. CE03870R) Rihchiuso, et al., assigned to the assignee of the present invention, and incorporated by reference herein.

Data transmission and channel assignment from base stations 101-102 in accordance with the preferred embodiment of the present invention occurs as
30 follows: Reverse Access (Common Control) channel circuitry receives a subscribe message from a remote unit to join a multicast session. The subscribe message is preferably transmitted over a traffic channel that has already been established between the remote unit and the base station. As described above, the subscribe message comprises an IGMP message for subscribing to the multicast
35 session. Logic unit 201 determines if it is currently subscribed to the requested

multicast session (i.e., another remote unit is currently subscribed to the session) and if so, an acknowledgment (Ack) message is sent to the remote unit. In the preferred embodiment of the present invention the Ack message contains the current channel (i.e., the assigned Walsh code and the long code), with the long
5 code being a function of the multicast IP address. In the preferred embodiment of the present invention, the Ack message contains the Supplemental Channel Walsh code and long code that is used by the remote unit to demodulate the multicast session. In the preferred embodiment, if base stations 101-102 are not currently
10 subscribed to the multicast session, logic unit 201 determines the multicast address and sends a query message requesting to join the multicast session.

During the multicast session, each remote unit 113-118 receives downlink supplemental transmission 109-110 that contains high-speed data (e.g., video). In the preferred embodiment of the present invention a single supplemental channel is utilized for each base station 101-102. On the uplink side, the supplemental
15 channel is shared among all remote units, however only one remote unit 113-118 is allowed to transmit at a time utilizing the uplink supplemental channel. The remote unit, that is currently transmitting utilizing the uplink supplemental channel, has its transmission broadcast (via downlink supplemental channels 109-110) to all other remote units participating in the multicast. For example, as
20 shown in FIG. 1, remote units 113-118 are participating in a multicast session, with remote unit 118 supplying high speed data via uplink supplemental channel 111. The high-speed data is transmitted to all remote units 113-118 involved in the session via downlink supplemental channels 109-110.

Even though only one remote unit 113-118 can simultaneously supply
25 high-speed data to the multicast session, all remote units 113-118 can simultaneously participate (by voice and all control messages) in the session via fundamental traffic channels 103-108. Thus, in accordance with the preferred embodiment of the present invention, all remote units 113-118 can supply voice traffic via uplink fundamental channels 103-108. The voice traffic for all remote
30 units 113-118 is combined (discussed below) and transmitted to all remote units 113-118 via a downlink fundamental traffic channel.

In the preferred embodiment of the present invention each remote unit 113-118 may transmit utilizing the uplink supplemental channel. A decision is made as to which remote unit is providing a highest-voice-energy fundamental channel
35 uplink, and that remote unit is assigned the uplink supplemental channel. For

example, with reference to FIG. 1, uplink fundamental channel 107 has the highest-voice-energy out of all uplink fundamental channels 103-108, since supplemental channel 111 has been assigned to remote unit 118. Thus in accordance with the preferred embodiment of the present invention a plurality of uplink transmissions are received from a plurality of remote units. A determination is made as to which remote unit has the highest uplink transmit energy, and that remote unit is assigned the high-data-rate uplink channel. This process repeats periodically, with new remote units constantly being assigned the high-speed-data channel based on their transmit energy. Thus in accordance with the preferred embodiment of the present invention at a later time a second plurality of uplink transmissions are received from the plurality of remote units, and a second remote unit is determined and assigned the supplemental channel as described above.

The present invention allows for only a single remote unit 113-118 to transmit on a supplemental channel at a time. Because of this, over-the-air traffic is greatly reduced. Additionally, since high-speed transmission is limited, network traffic is similarly reduced.

FIG. 3 is a flow chart showing operation of the base stations of FIG. 1 and FIG. 2 in accordance with the preferred embodiment of the present invention. The following description assumes that remote units 113-118 are actively participating in a group call, each having a unique traffic channel assigned, and a shared uplink and downlink supplemental channel assigned. The logic flow begins at step 301 where logic unit 201 receives a plurality of uplink traffic channel transmissions from remote units 113-118 involved in the group call. Next, at step 303 logic unit 201 determines if a remote unit involved in the call, within the base station's coverage area, is actively transmitting on an uplink supplemental channel. If a local remote unit is actively transmitting an uplink supplemental channel, then the logic flow continues to step 305 where the uplink supplemental channel data is transferred to network 112. If, at step 303 it is determined that no remote unit involved in the group call is currently transmitting an uplink supplemental channel, then the logic flow continues to step 307. At step 307, logic unit 201 transfers the signals received via the traffic channels to an MCU 119-120.

At step 309 logic unit 201 receives downlink traffic channel data and downlink supplemental channel data from network 112. Additionally, logic unit 201 receives an uplink supplemental channel assignment command from the

MCU. In the preferred embodiment of the present invention the downlink traffic channel data is a combination of a plurality of remote unit uplink voice transmissions for those remote units involved in the call. The downlink supplemental channel data is data transmitted from a remote unit actively transmitting an uplink supplemental channel. Finally, the uplink supplemental channel assignment command comprises instructions on which remote unit should be given permission to transmit data using the uplink supplemental channel.

At step 311, the base station broadcasts the downlink supplemental channel data and downlink traffic channel data to all remote units 113-118 involved in the call. At step 313 logic unit 201 determines (via the supplemental channel assignment command) if a remote unit involved in the call, within the base station's coverage area should be assigned the uplink supplemental channel. If at step 313 it is determined that a remote unit within the base station's coverage area should be assigned the uplink supplemental channel, then the logic flow continues to step 315 where the channel is assigned, otherwise the logic ends at step 317.

As discussed above, in accordance with the preferred embodiment of the present invention only a single remote unit is allowed to transmit at a time utilizing the supplemental channel. The supplemental channel is shared among remote units so that every remote unit involved in the group call can transmit utilizing the supplemental channel. Because of this, over-the-air traffic is greatly reduced. Additionally, since high-speed transmission is limited, network traffic is similarly reduced.

FIG. 4 is a block diagram of an MCU of FIG. 1 in accordance with the preferred embodiment of the present invention. MCU 119/120 comprises Logic Unit 401, Selection/Distribution Unit 403, Transcoder (XCDR) 404, Summer 405, and Energy Detector 406. In the preferred embodiment of the present invention the MCU is coupled to local base stations within its RAN. Additionally, for each group call, a master MCU is identified if the group call involves more than one RAN. In the preferred embodiment of the present invention the master MCU is the MCU that the caller belongs to. In a group call, the person who initiates a call with a group listed phone numbers is identified as a "caller", the person who is called by one of the listed phone numbers is identified as a "callee". Because a group call is not a point-to-point call, the call has to use MCUs as a conference bridge. The first connection of the caller is an MCU assigned by a gatekeeper or a

CBSC. This identified MCU is defined as a master MCU. All other subsequent MCUs are identified as slave MCUs.

Once a master MCU is identified (in this case MCU 120) all local highest-voice-energy information in local (slave) MCU's are sent to the master MCU. This is accomplished by sending the two highest-voice-energies in each slave MCU to the master MCU 120 by default. The remote unit with the highest-voice-energy info in all MCU's is identified by the master MCU, and that remote unit is granted the uplink supplementary channel for sending video to its BTS and its MCU.

Operation of a master MCU in accordance with the preferred embodiment of the present invention occurs as illustrated in FIG. 5. At step 501 selector/distributor unit 403 receives a plurality of uplink transmissions (traffic channel) from a plurality of remote units within its local RAN. In the preferred embodiment of the present invention the plurality of uplink transmissions comprise fundamental traffic channel data comprising voice data transmitted from all remote units involved in the group call, however in alternate embodiments, fundamental traffic channel data may comprise other forms of data such as power control, supplementary channel request/grant/setup issues, soft handoff, etc.

Once fundamental traffic channel data has been received, energy detector unit 406 analyzes each signal to determine the strongest two voice signals (step 503). In the preferred embodiment of the present invention, each uplink fundamental traffic channel sends voice compressed code (EVRC, Enhanced Variable Rate Data Codec, for CDMA by IS-127) data to a local MCU. Based on the code rate (Rate 1 => full, Rate 1/2 => half, Rate 1/8 => 1/8 rate or all 1's rate) bits and FCBG/ACBG (Fixed/Adaptive CodeBook Gain) bits in each uplink traffic channel, the voice energy is calculated in the energy detector unit 406.

At step 505, logic unit 401 receives a plurality of uplink transmissions (traffic channel) from a plurality of remote units (involved in the group call) that are not part of its local RAN. In addition to the uplink transmission, information on the highest-voice-energy channel and the second highest-voice-energy channel for those remote units is also provided. In other words, at step 505 each slave MCU provides the master MCU with the uplink transmissions from the highest two energy uplink transmissions, within the slave MCUs local RAN, for those remote units involved in the call. Logic unit 401 then identifies which channels are the highest-voice-energy and second highest voice energy channels for all

remote units 113-118 participating in the call (step 507). In other words, at step 507, a subset of all remote units involved in the call is determined based on an energy of their uplink transmission. At step 509, the logic unit 401 sends the highest-voice-energy and the second highest-voice-energy channel data to transcoder unit 404 where they are decoded as two PCM streams. These streams are summed in summation unit 405 and combined as one steam with AGC (Automatic Gain Control), and then encoded with EVRC vocoder 407 in transcoder unit 404 (step 511). The encoded EVRC data is sent to every slave MCU through the selector/distributor unit 403 by network 112. Every MCU sends this duplicated encoded EVRC data to all remote units 113-118 involved in the call via downlink fundamental traffic channel 103-108, respectively (step 513).

In the preferred embodiment of the present invention only two signals are combined because the EVRC vocoder can only encode a maximum two people's voices. If more than two people's voices sum together, patch information is beyond the limitation of EVRC vocoder. Additionally, by summing the highest voice energy background noise in the conference is greatly reduced. It should be noted though, that in alternate embodiments, where other forms of vocoding are used, more than two voices can be summed together.

At step 515, the energy detector and logic control unit in master MCU determines a talker with the cumulated highest-voice-energy. At step 517, logic unit 401 determines if a new talker exists with the time cumulated highest-voice-energy in a certain time period (the time period can be 1 second), and if so, the logic control unit in the master MCU sends the switch talker request signal (uplink supplemental channel assignment command) to all BTS's by RNCs (step 519). The logic flow returns to step 501. If, at step 517 it is determined that a new talker does not exists with the time cumulated highest-voice-energy in a certain time period, the logic flow returns to step 501.

In the preferred embodiment of the present invention the listeners and current talker receive downlink supplementary channel information from their fundamental traffic channels. A future talker receives the uplink supplementary channel information from its fundamental traffic channel. After RNCs and master MCU get all acknowledgments, a supplemental channel assignment is issued before the new video I (Intra) frame is generated in the current talker.

The procedure involves only the current talker and future talker. If the current talker and new talker are in the same BTS, the RNCs, through the BTS,

send the uplink supplementary info to the new talker and downlink supplementary info to current talker. When the RNCs and master MCU get acknowledges from current and new talkers, the channel assignment command is sent out. The current talker will close the uplink supplementary channel transmission and turn on the downlink supplementary receiver. After the BTS gets the acknowledge from current talker, the new talker turns off the downlink supplementary receiver and turns on the uplink supplementary transmission. If current talker and new talker are in the different BTS's, and the new talker's BTS has the uplink supplementary resource, the channel assignment command is sent out from RNC's and master MCU. The current talker turns off the uplink supplementary transmission and turns on the downlink supplementary receiver, and its BTS turns off the uplink supplementary receiver. The new talker turns off the downlink supplementary receiver and turns on the uplink supplementary transmission, and its BTS turns on the uplink supplementary receiver. All supplementary channel control messages, such as power control, request, acknowledge etc, are sent to /received from via individual fundamental channels.

Since there is no requirement for each remote unit to change the fundamental traffic channel, the fundamental traffic channel is a basic voice and control channel. All info for supplementary channel setup is sent from the fundamental traffic channel as well. No matter how a master MCU switches a talker, each remote unit 113-118 uses its fundamental traffic channel 103-108 to listen to either one talker or two talkers. Since the fundamental traffic channels 103-108 have already been assigned between every remote unit 113-118 and its BTS 101-102, all information for the supplementary channels 109-111 can be predicted in advance greatly reducing the set up time for the supplementary channel. Additionally, since the fundamental traffic channels 113-118 are designed as narrow band channels and the supplementary data channels 109-111 are designed as wide band channels, the supplementary channel broadcast can greatly save RF resources.

FIG. 6 is a flow chart showing operation of a Multiple Control Unit of FIG. 1 in accordance with the preferred embodiment of the present invention. At step 601 selector/distributor unit 403 receives fundamental traffic channel uplink data from base stations within its local RAN. In the preferred embodiment of the present invention fundamental traffic channel data comprises voice data transmitted from all remote units involved in the group call, however in alternate

embodiments, fundamental traffic channel data may comprise other forms of data such as power control, supplementary channel request/grant/setup issues, soft handoff, etc. Once fundamental traffic channel data has been received, energy detector unit 406 analyzes each signal to determine the strongest two voice signals (step 603). At step 605, logic unit 401 transmits the two highest energy signals to a master MCU.

While the invention has been particularly shown and described with reference to a particular embodiment, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention. For example, although remote units 113-118 are shown as mobile units, one of ordinary skill in the art will recognize that remote units 113-118 may be stationary. Additionally, although MCUs 119-120 were shown existing separate from base stations 101-102, in an alternate embodiment of the present invention, MCUs 119-120 may be incorporated into base station circuitry. It is intended that all such changes come within the scope of the following claims and their equivalents:

CLAIMS

1. A method for transmission within a wireless communication system, the method comprising the steps of:

5 receiving a plurality of uplink transmissions from a plurality of remote units;

determining a subset of the plurality of remote units, wherein the subset is determined based on an energy of an uplink transmission of each remote from the plurality of remote units;

10 combining uplink transmissions for the subset to produce a combined signal; and

transmitting the combined signal to a base station to be broadcast via a downlink communication signal to the plurality of remote units.

15 2. The method of claim 1 wherein the step of receiving the plurality of uplink transmissions from the plurality of remote units comprises the step of receiving a plurality of traffic channel transmissions from the plurality of remote units.

20 3. The method of claim 1 wherein the step of determining the subset of the plurality of remote units comprises the step of determining a second plurality of remote units from the first plurality of remote units, wherein the second plurality of remote units have uplink transmissions having a highest energy.

25 4. The method of claim 1 wherein the step of combining the uplink transmissions for the subset comprises the steps of:

decoding uplink transmissions for the subset to produce a plurality of decoded transmissions;

summing the plurality of decoded transmissions to produce a summed decoded transmission; and

30 encoding the summed decoded transmission.

35 5. The method of claim 1 wherein the step of transmitting the combined signal to the base station to be broadcast via the downlink communication signal comprises the step of transmitting the combined signal to the base station to be broadcast via a downlink traffic channel to the plurality of remote units.

6. A method for transmission within a wireless communication system, the method comprising the steps of:

5 receiving a first plurality of uplink voice transmissions from a plurality of remote units;

determining a second plurality of uplink voice transmissions from the first plurality of uplink voice transmissions, wherein the second plurality of uplink voice transmissions are determined based on an energy of their transmission;

10 combining the second plurality of uplink voice transmissions; and transmitting the combined uplink voice transmissions to a base station to be broadcast via a downlink voice channel to the plurality of remote units.

7. The method of claim 6 wherein the step of determining the second plurality of uplink voice transmissions based on an energy of their transmissions comprises
15 the step of determining a plurality of uplink voice transmissions having a highest energy.

8. The method of claim 6 wherein the step of combining the second plurality of uplink voice transmissions comprises the steps of:

20 decoding each of the second plurality of uplink voice transmissions; summing the decoded transmissions to produce a summed decoded transmission; and encoding the summed decoded transmission.

25 9. An apparatus comprising:

a logic unit having a first plurality of uplink transmissions from a plurality of remote units as an input and outputting a second plurality of uplink transmissions taken from the first plurality of uplink transmissions, wherein the second plurality of uplink transmissions are determined based on an energy
30 of their uplink transmission; and

a transcoder having the second plurality of uplink transmissions as an input and outputting a signal equivalent to the combination of the plurality of uplink transmissions.

10. The apparatus of claim 9 wherein the first plurality of uplink transmissions comprise a plurality of uplink traffic channel transmissions.

5 11. The apparatus of claim 9 wherein the second plurality of uplink transmissions comprise highest energy transmissions from the first plurality of uplink transmissions.

004020 "SEE" 560

Abstract of the Disclosure

5 In accordance with the preferred embodiment of the present invention all remote units (113-118) participating in a group call can actively transmit uplink communications to their respective base stations (101-102) via low-data rate traffic channels (103-108). The remote units having the highest transmit energies are summed and broadcast to all remote units (113-118) participating in the group
10 call. Because only those remote units having the highest transmit energies are summed and broadcast, network congestion is greatly reduced.

Table 1

Parameter	Value
Mean	0.0000
Standard deviation	0.0000
Variance	0.0000
Skewness	0.0000
Kurtosis	0.0000
Maximum	0.0000
Minimum	0.0000
Range	0.0000
Interquartile range	0.0000
Median	0.0000
Mode	0.0000
Trimmed mean	0.0000
Weighted mean	0.0000
Geometric mean	0.0000
Harmonic mean	0.0000
Logarithmic mean	0.0000
Exponential mean	0.0000
Poisson mean	0.0000
Negative binomial mean	0.0000
Beta mean	0.0000
Gamma mean	0.0000
Weibull mean	0.0000
Gumbel mean	0.0000
Laplace mean	0.0000
Cauchy mean	0.0000
F distribution mean	0.0000
T distribution mean	0.0000
Chi square mean	0.0000
Normal mean	0.0000

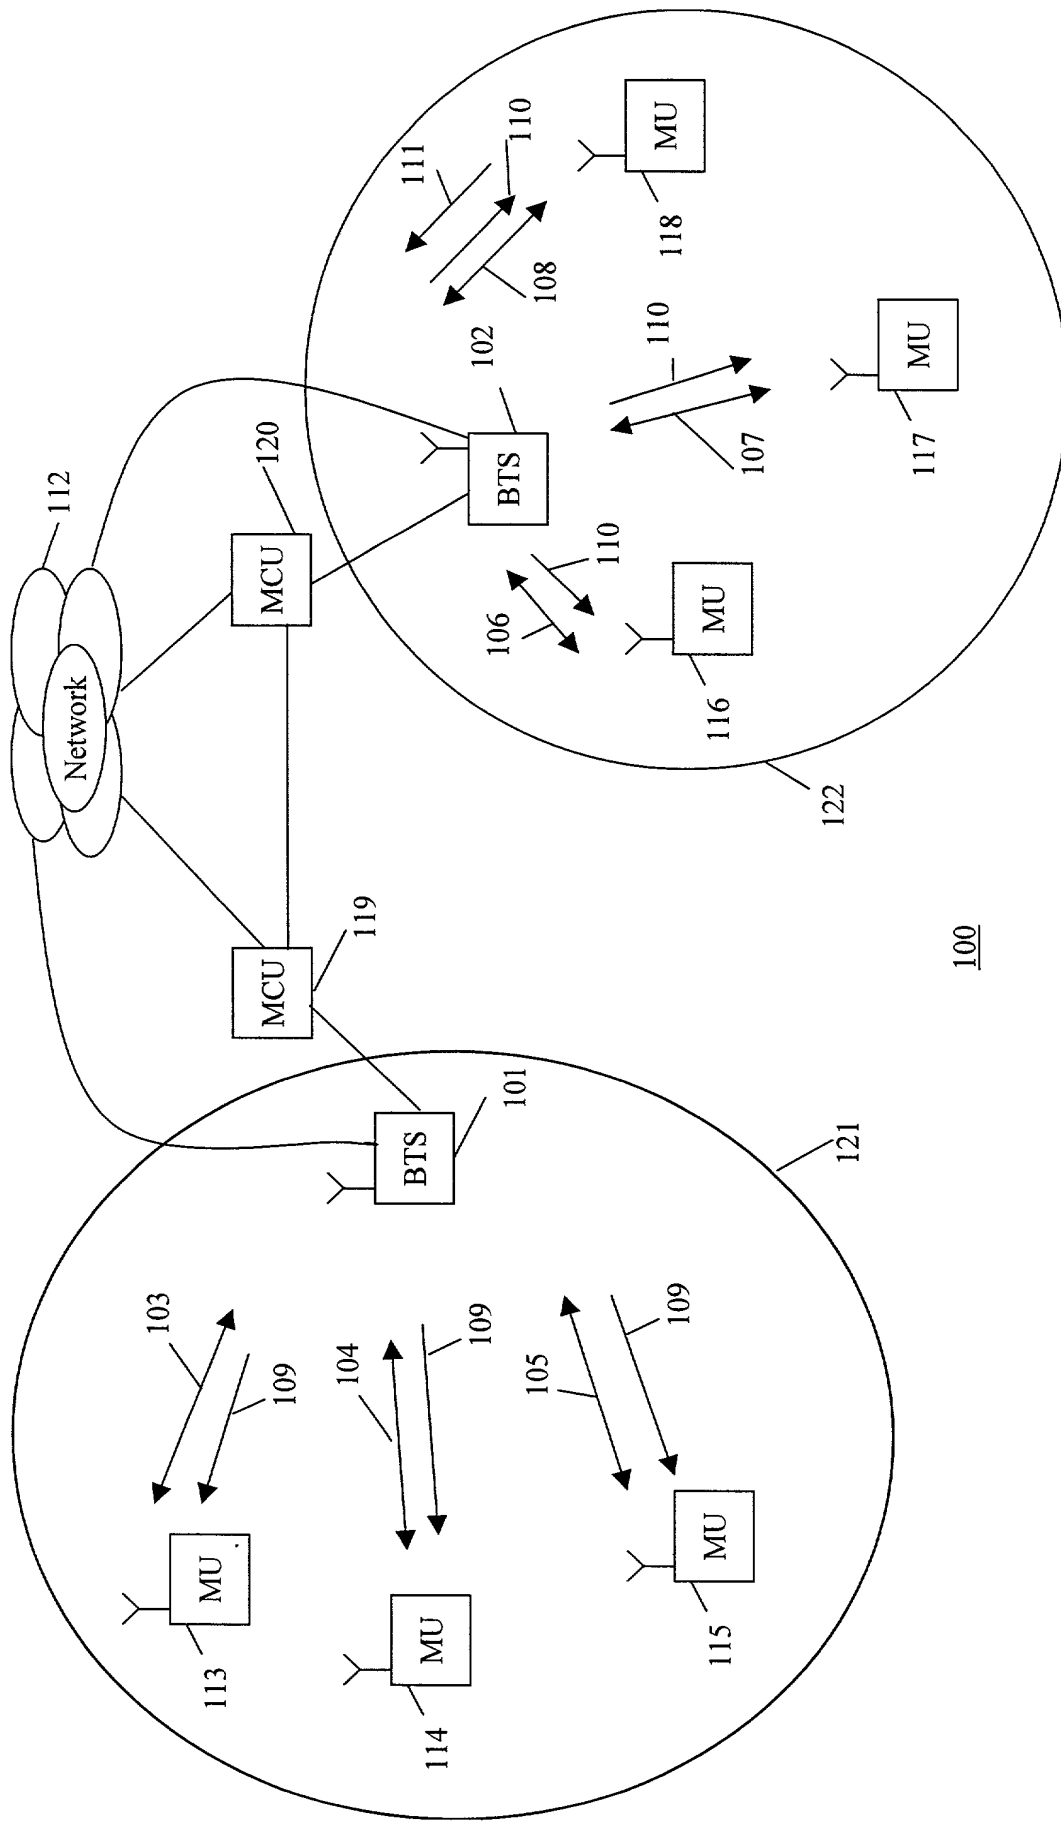
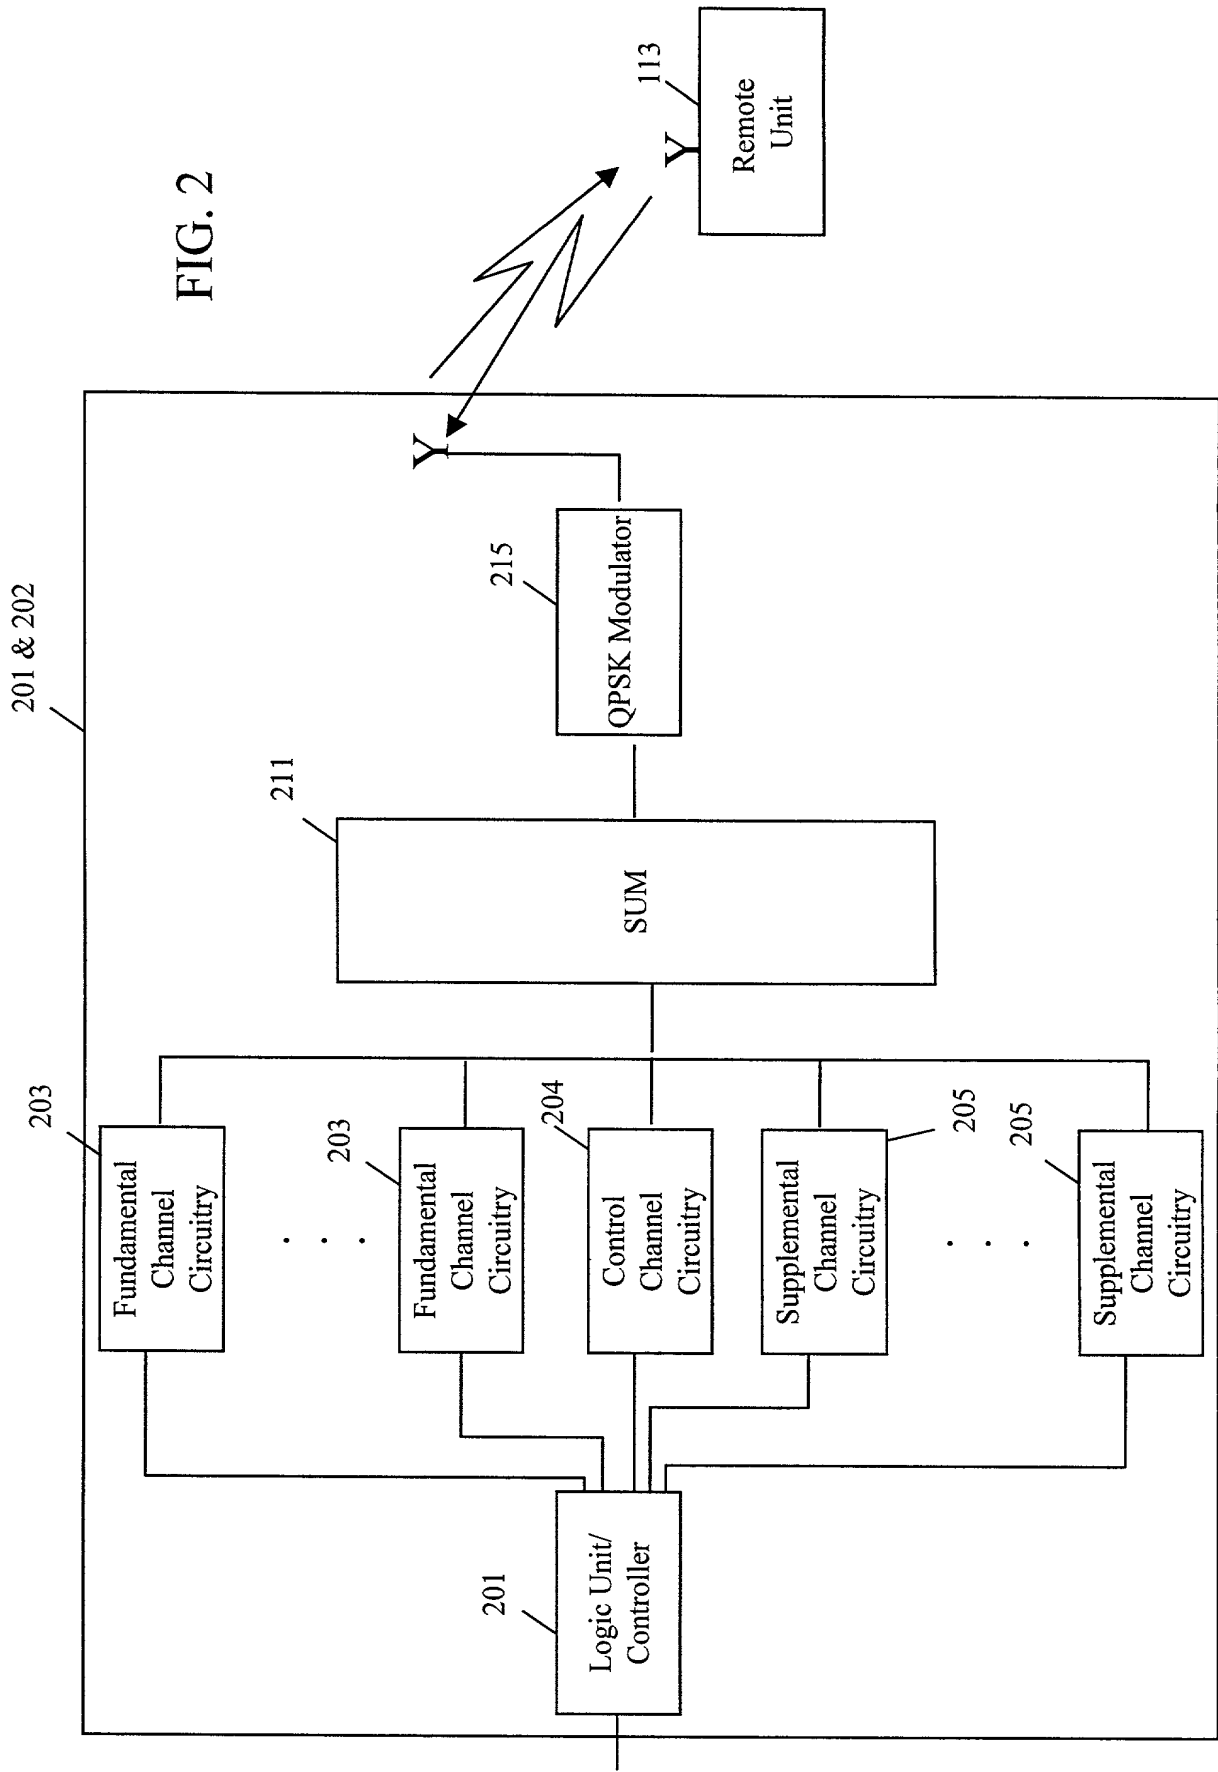


FIG. 1



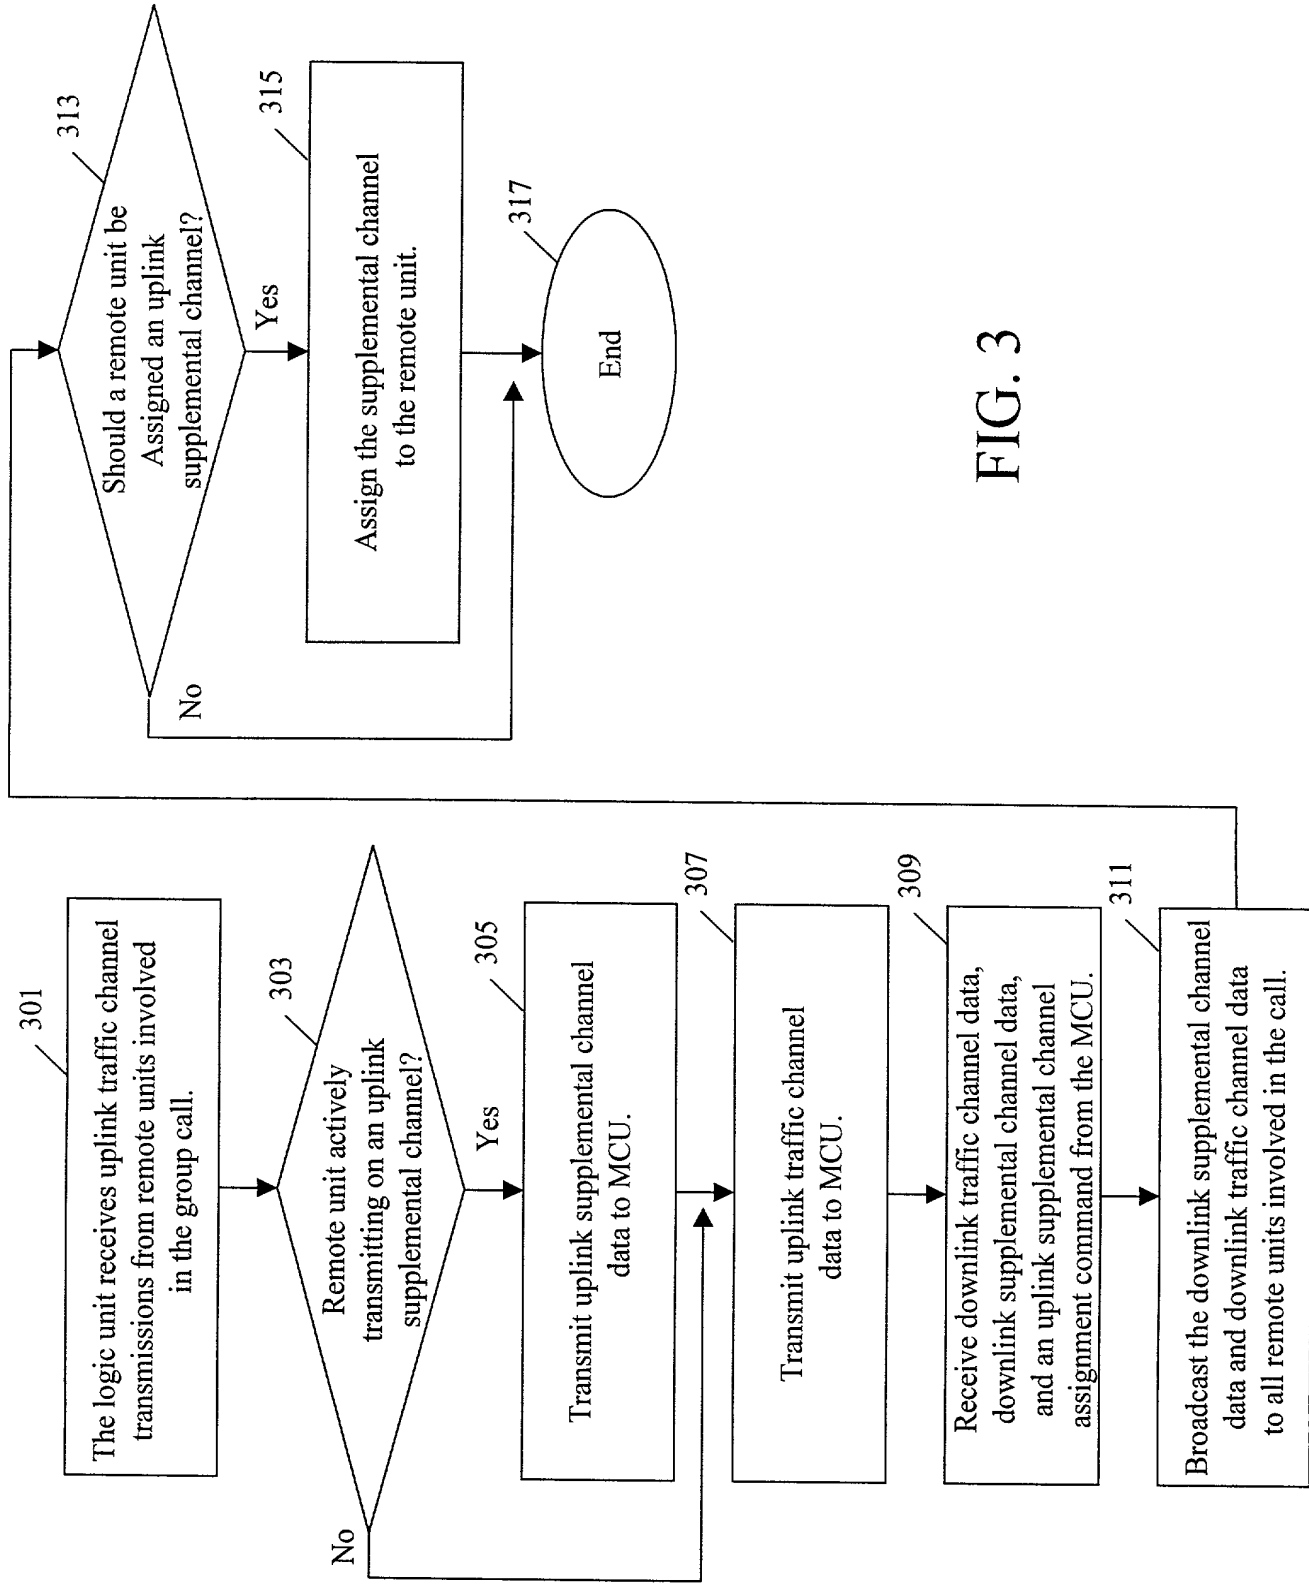


FIG. 3

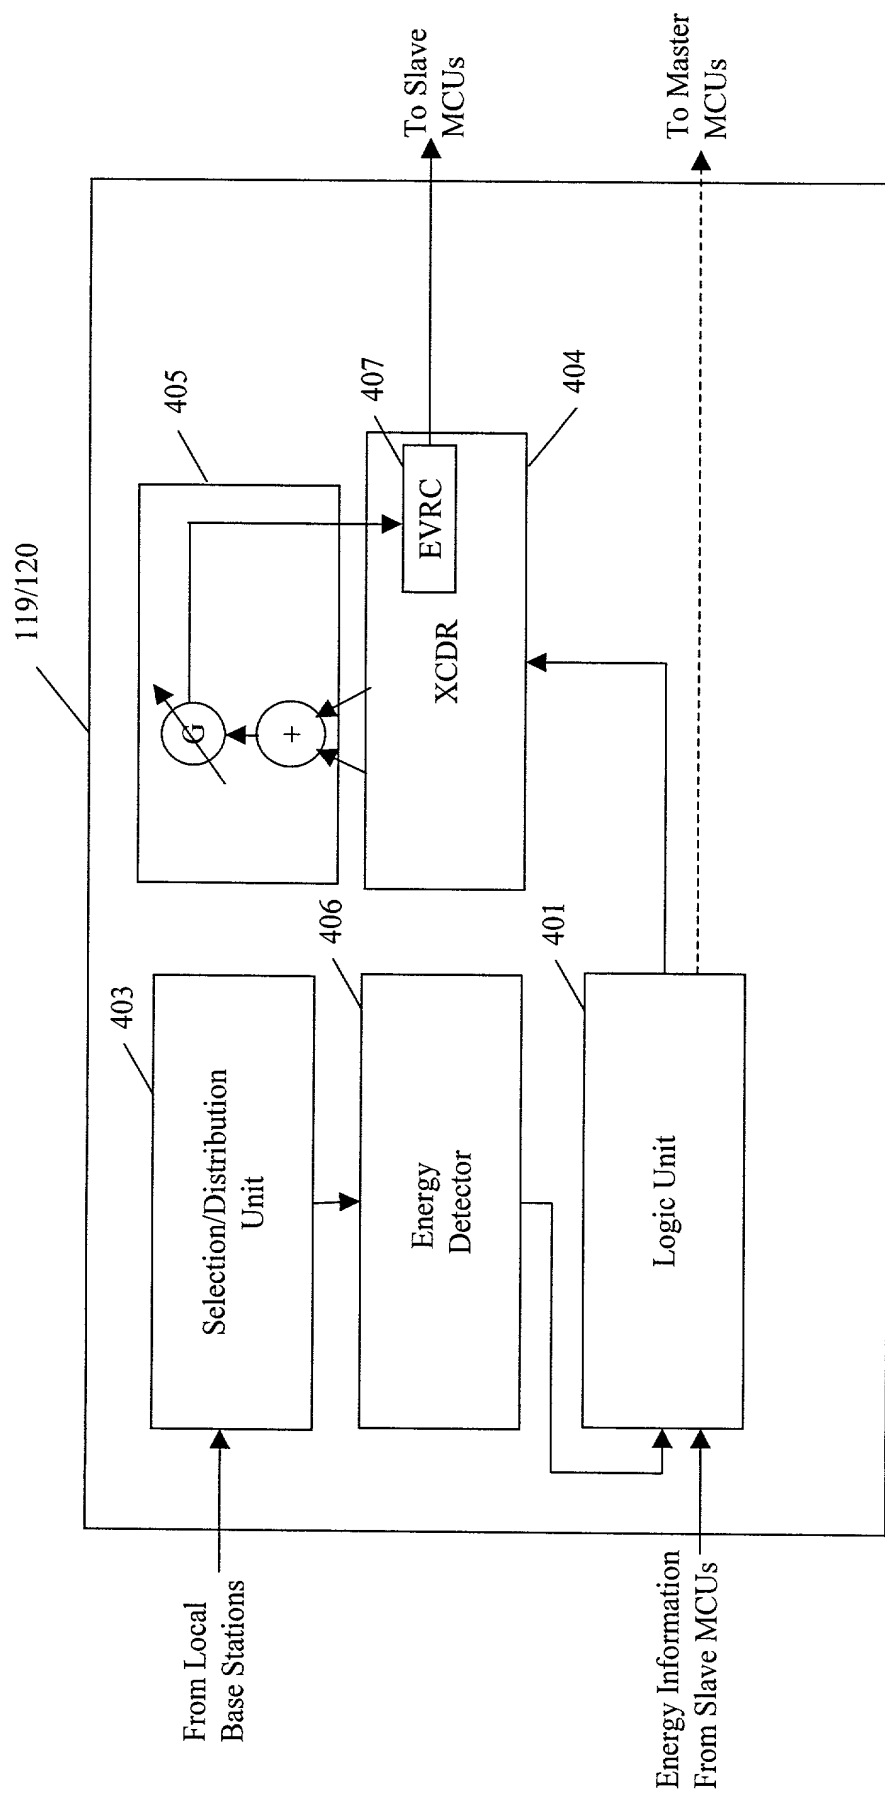


FIG. 4


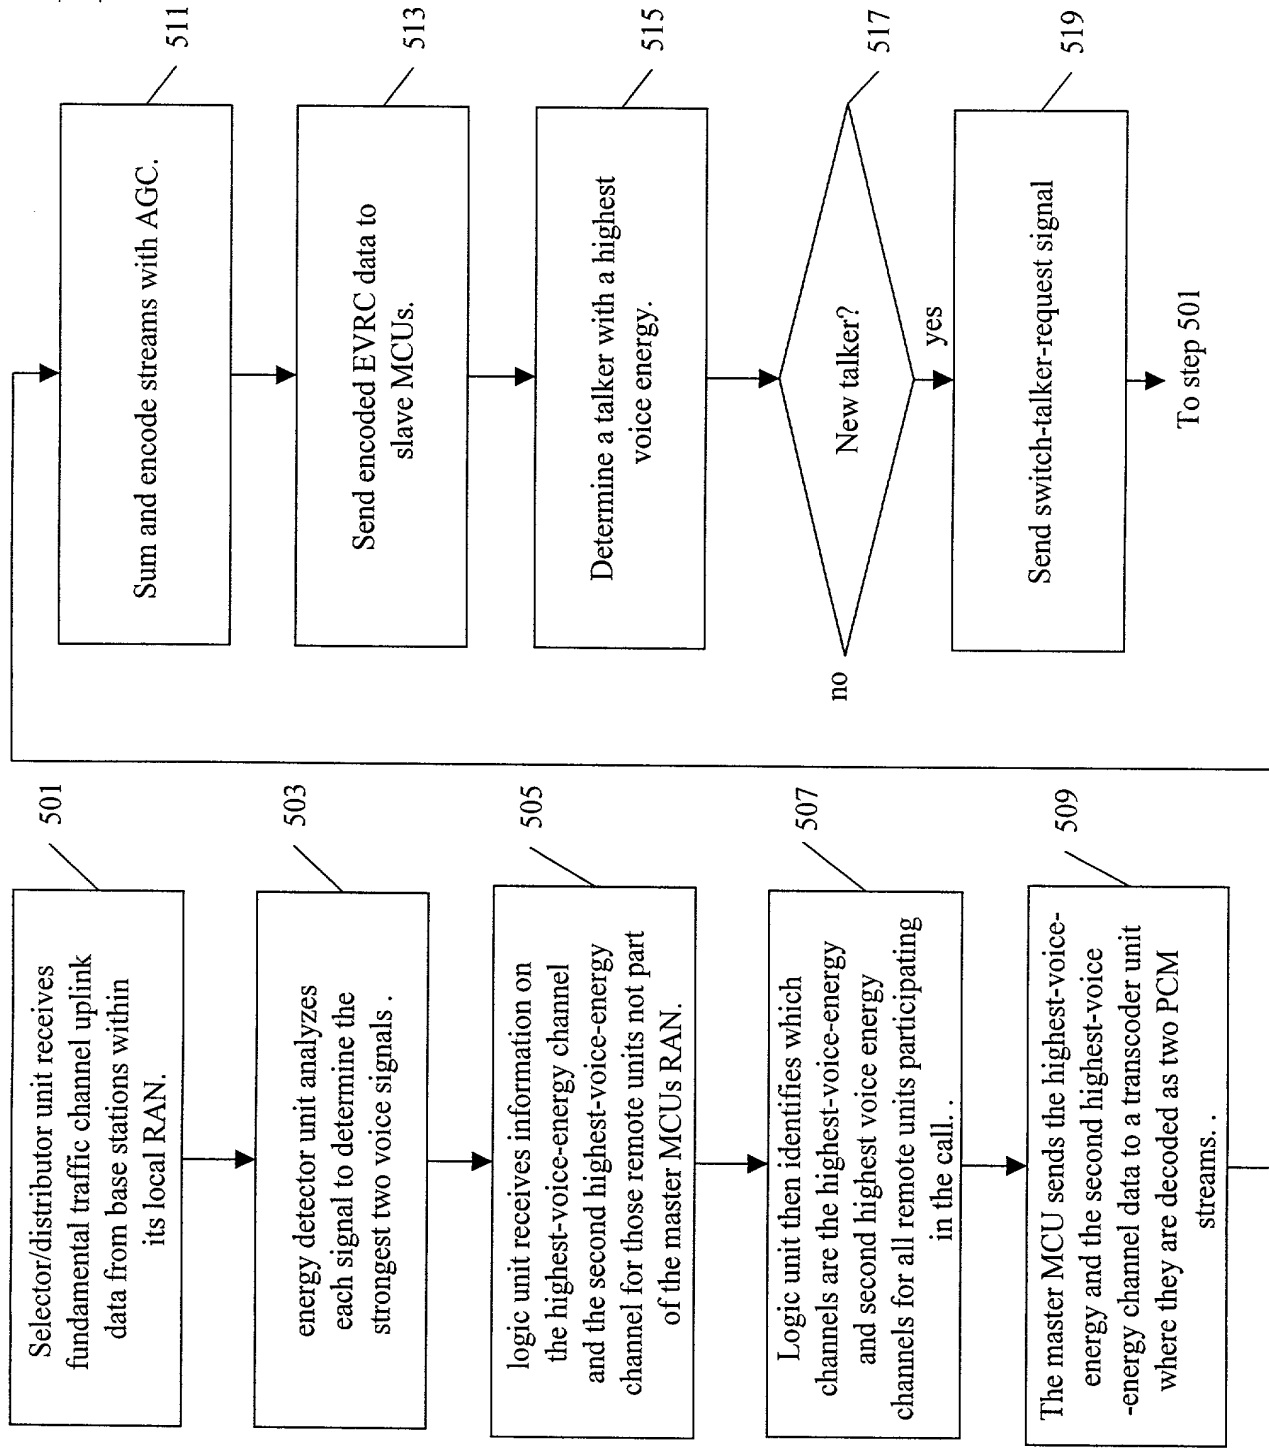


FIG. 6



PATENT APPLICATION DECLARATION
COMBINED WITH POWER OF ATTORNEY

Attorney's Docket No.: CE08144R

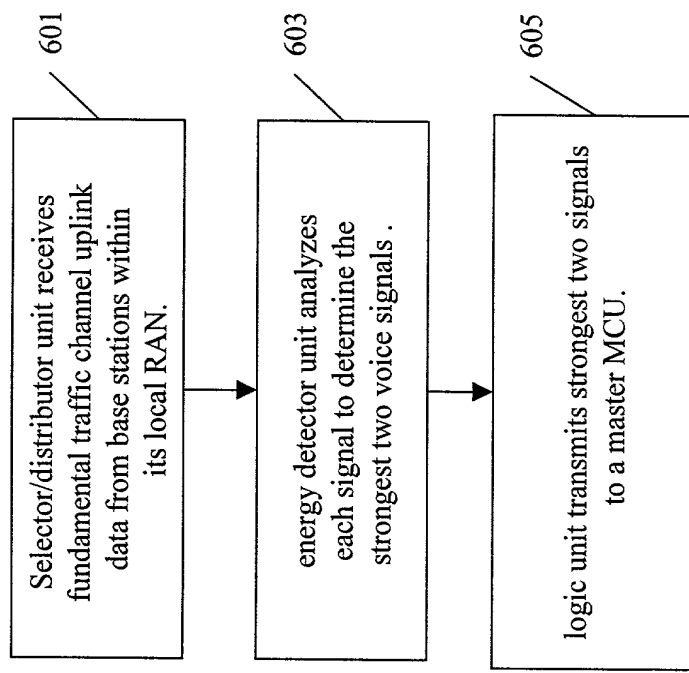

Regular (Utility)



Design Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TRANSMISSION WITHIN A WIRELESS COMMUNICATION SYSTEM

the specification of which:



is attached hereto



was filed on: _____

as U.S. Serial No.: _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign/PCT Application(s):



no such application(s) filed



such application(s) identified as follows:

Application Number	Country	Date of Filing (day, month, year)	Priority Claimed Under 37 U.S.C. 119
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:

Provisional Application Serial No.:

CE08144R

Provisional Application Filing Date: _____

I hereby claim the priority benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which is material to the patentability of this application and which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s):



no such application(s) filed



such application(s) identified as follows:

Application No.	Filing Date (day, month, year)	Status (Patented, Pending, Abandoned)

I HEREBY APPOINT THE FOLLOWING AS MY ATTORNEY(S) OR AGENT(S) WITH FULL POWER OF SUBSTITUTION ASSOCIATED WITH:

CUSTOMER NUMBER 22917

TO PROSECUTE THIS APPLICATION AND TRANSACT ALL BUSINESS IN THE PATENT AND TRADEMARK OFFICE CONNECTED THEREWITH:

Send correspondence to:


Motorola, Inc.
Intellectual Property Section
Law Department
1303 E. Algonquin Road
Schaumburg, IL 60196

Attention: Intellectual Property


Direct telephone calls to: (847) 576-6937
Direct faxes to: (847) 576-3750


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first-named or sole inventor			SHAOWEI PAN				
Inventor's signature				Date		2/29/00	
Residence		Lake Zurich		Illinois			
		City		State or Foreign Country			
Citizenship		China					
		Country					
Post Office Address		157 W. Harbor Drive					
		Street Address					
Lake Zurich		Illinois		60004			
City		State or Country		Zip Code			

Full name of second-named joint inventor			JINZHONG ZHANG				
Inventor's signature				Date		2/29/00	
Residence		Schaumburg		Illinois			
		City		State or Foreign Country			
Citizenship		China					
		Country					
Post Office Address		1919 Prairie Sq., #132					
		Street Address					
Schaumburg		Illinois		60173			
City		State or Country		Zip Code			

Full name of third-named joint inventor <u>CHUNYANG MENG</u>		
Inventor's signature <u></u>	Date <u>2/29/00</u>	
Residence <u>Lake Zurich</u>	Illinois	
City	State or Foreign Country	
Citizenship <u>China</u>	Country	
Post Office Address <u>1119 Lexington Lane</u>		
Street Address		
<u>Lake Zurich</u>	<u>Illinois</u>	<u>60047</u>
City	State or Country	Zip Code

Full name of fourth-named joint inventor <u>HECHUN CAI</u>		
Inventor's signature <u></u>	Date <u>2/29/00</u>	
Residence <u>Vernon Hills</u>	Illinois	
City	State or Foreign Country	
Citizenship <u>China</u>	Country	
Post Office Address <u>42 Southfield Drive</u>		
Street Address		
<u>Vernon Hills</u>	<u>Illinois</u>	<u>60061</u>
City	State or Country	Zip Code

Full name of fifth-named joint inventor <u>RICHARD A. COMROE</u>		
Inventor's signature <u></u>	Date <u>2/29/00</u>	
Residence <u>South Barrington</u>	Illinois	
City	State or Foreign Country	
Citizenship <u>USA</u>	Country	
Post Office Address <u>10 Lexington Road</u>		
Street Address		
<u>South Barrington</u>	<u>Illinois</u>	<u>60010</u>
City	State or Country	Zip Code

CE08144R